


Front View

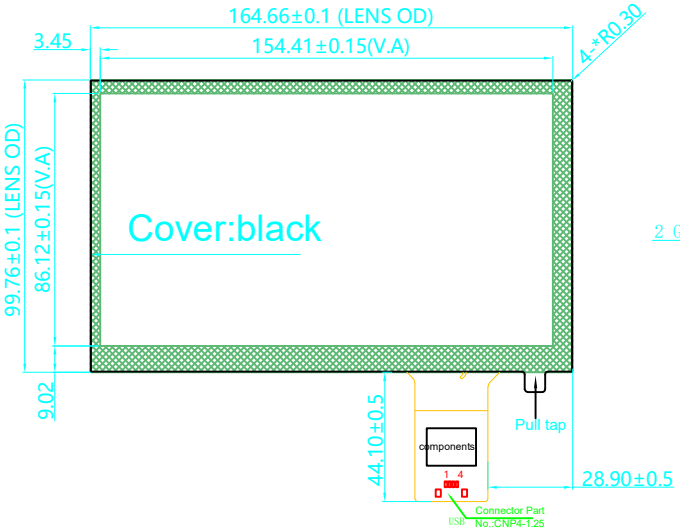

Side View

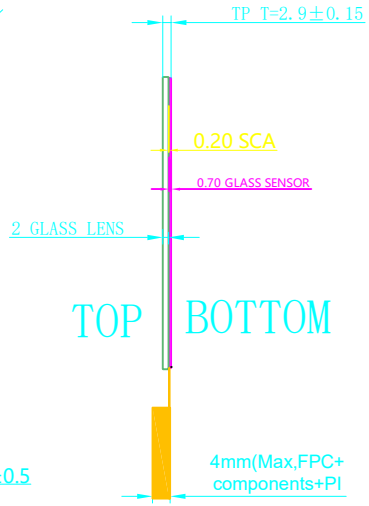

Back View

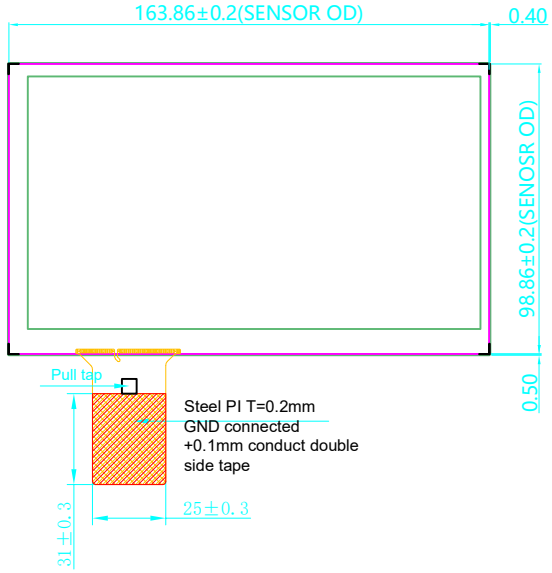

Parameters:
1.GLASS+SCA+GlassITO+FPC
2.COF: ILI2511
3.Glass material:AGC
4.Light transmittance rate ≥86%
5.Cover hardness≥6H
6.TP operation Temp.:-20℃~+70℃，≤90%RH
7.TP storage temp.:-30℃~+80℃，≤90%RH
8.ROHS compliance
9.Unmarked tolerance±0.2mm

USB-TP Interface:

PIN	Assignment
1	VDD
2	D-
3	D+
	GND

Engineer Drawing			MAXEN ELECTRONICS LIMITED			
Direction			Model No.	HCT1829GG070A1-V0	Tolerance	±0.20
Prepared By	Auditor	Date	Client No.		Unit	mm
			Date	2023-5-10	Ratio	1 : 1